



2 in 1 USB Adapter USB 3.0 3-Port Hub & Gigabit Ethernet Adapter UE330

Highlights

- · Adds 3 additional USB 3.0 Ports
- Adds Gigabit Ethernet Network Connectivity
- Compact Design for Ultra Portability
- Plug and Play
- Enhanced Data Transfer Stability
- Enhanced Compatibility



USB 3.0 Port



lug & Play



Gigabit
Ethernet Port




Mac X OS



Windows OS

Features

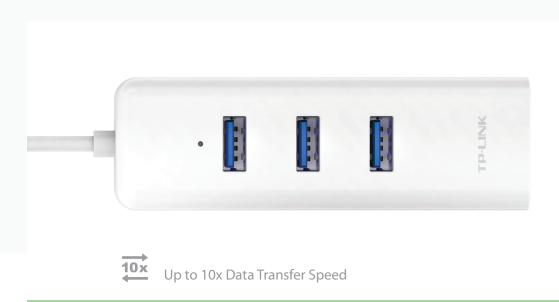



3 Additional USB 3.0 Ports

3 Additional USB 3.0 Ports

This light and compact gadget adds 3 additional USB 3.0 ports to your devices for simultaneous use of a variety of USB devices.

USB 3.0 supports up to 10x fast data transfer speed as USB 2.0, also backward compatible with USB 2.0/1.1 devices.






Gigabit Ethernet Adapter

This light and compact gadget is also a Gigabit Ethernet network adapter, adding Gigabit Ethernet network connectivity to your ultrabook, chromebook, laptop, desktop or any other devices.


Gigabit Ethernet connection supports up to 1000Mbps reliable wired network connection.

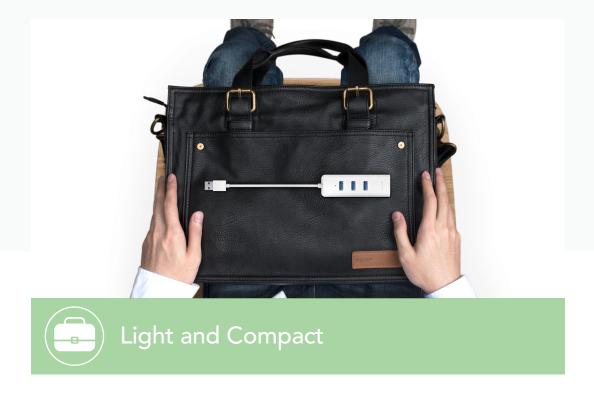

2 in 1 USB Adapter, Light and Compact

This gadget combining USB 3.0 3-Port hub and Gigabit Ethernet adapter within a light and compact body, still stay in ultra portability.

Features

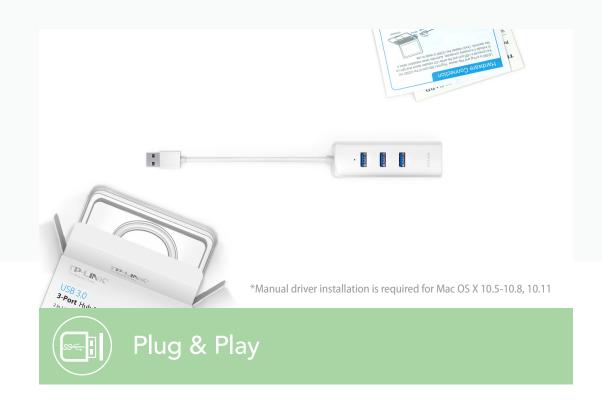



This user friendly gadget supports Plug and Play feature that enables user to use it by simply connecting it to an available USB port without manual driver installation.



Enhanced Stability and Compatibility

Utilizing advanced chipset solution, this reliable gadget ensures you fast and stable connection in Windows, Mac OS X, Chrome OS and Linux OS.

Specifications

Basic

Dimentions: 1.2x0.9x3.8 in. (31 x 23 x 96 mm)

Output Interface: 3 USB 3.0 Type A Ports

1 Gigabit Ethernet RJ45 Port

Input Interface: 1 USB 3.0 Type A Connector

Chipset: RTL8153

Others

Package Contents:

- · USB 3.0 3-Port Hub & Gigabit Ethernet Adapter UE330
- · User Guide

Supported Systems:

· Windows (XP/Vista/7/8/8.1/10), Mac OS X (10.5-10.11), Linux OS and Chrome OS

Environment:

- · Operating Temperature: $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$ ($32^{\circ}\text{F} \sim 104^{\circ}\text{F}$)
- · Storage Temperature: -20°C ~70°C (-4°F~158°F)
- · Operating Humidity: 10%~90% non-condensing
- · Storage Humidity: 5%~90% non-condensing